


Subject : Runners instructions

Dear competitors,


In order to preserve the material and the recommendations of the manufacturer of the Sparcraft mast, you will find below the instructions for use of the runners :

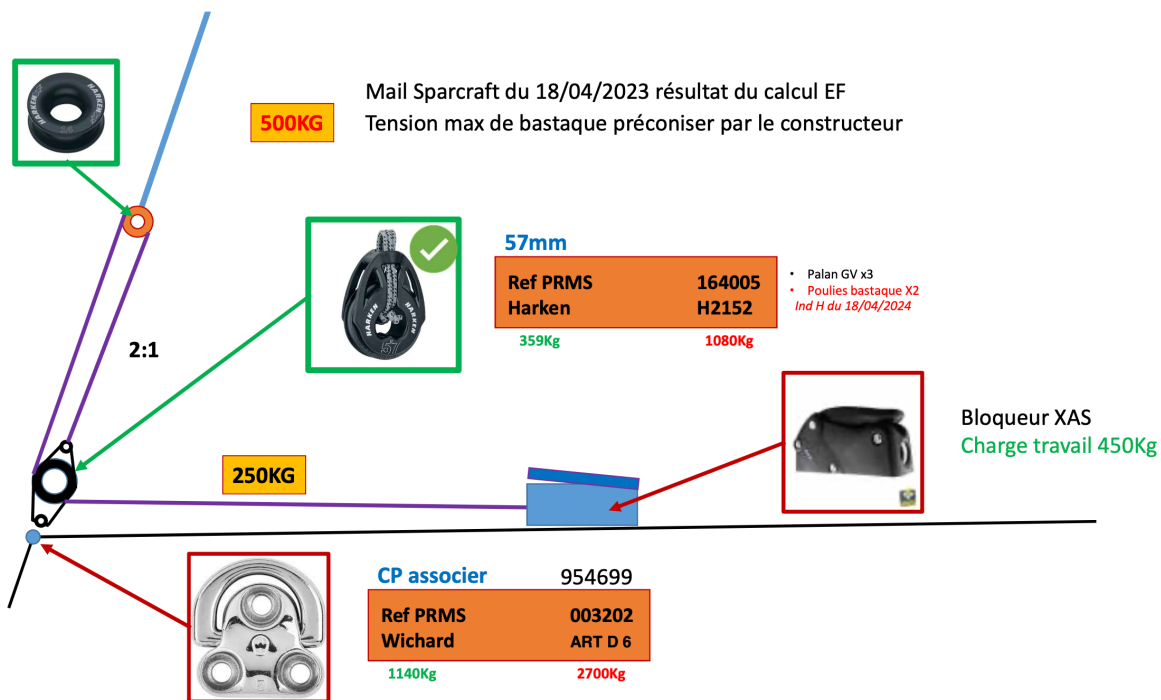

For information, with a tension of 500 kg on the runner, the pulley will work at 40% of its breaking load. A load of 800 kg on the runner would also be acceptable for the pulley.

In any case, because it is mounted on a hollow axle, should the block break, it will remain attached to the trigger guard and will not injure the crew.

Marking the maximum tension limit :

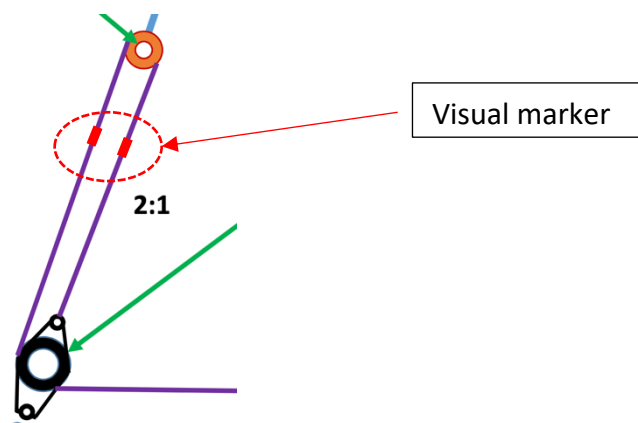

Martin Louchart
Technical manager